

# Cleanfire® HR<sub>x</sub>™ Oxy-fuel Burner



## Glass melting technology with expanded functionality and flexibility for unmatched performance



Oxy-fuel combustion has proven benefits over air-fuel combustion, including lower capital cost, higher fuel efficiency, and reduced NO<sub>x</sub>. For decades, customers have relied on our line of industry-leading Cleanfire oxy-fuel burners. With Air Products' patent-pending Cleanfire HR<sub>x</sub> burner you can expect even more . . . By allowing the user to control both the magnitude and location of oxygen staging up to 95% of the combustion oxygen, this burner harnesses the power of oxygen staging for both higher melting efficiency and foam reduction—resulting in significant energy and emissions reductions and improved product quality.

### Benefits you can count on

The Cleanfire HR<sub>x</sub> burner can safely operate with oxygen staging in excess of 95%, enabling benefits such as the following over air-fuel technology:

- Increased flame radiation for high fuel efficiency
- Ultra-low NO<sub>x</sub> emissions
- Foam reduction capability for higher-quality glass production
- Enhanced productivity

### How it works

The Cleanfire HR<sub>x</sub> burner offers you expanded functionality and flexibility with unmatched performance in your glass melting furnace; whether as a boost burner to complement the operation of an air-fuel furnace, or in a full oxy-fuel furnace to increase fuel efficiency, lower NO<sub>x</sub> emissions, or reduce foam.

Key features include:

- On-burner valves for easy adjustment of oxygen staging location and magnitude
- Extremely high flame radiation for highly efficient glass melting
- Flame length adjustability by a factor of up to 2x at a fixed firing rate
- Optional remote performance monitoring



Melt mode



Split mode



Foam control mode

Optimization of flame properties to achieve different melting objectives are readily enabled by adjustment to convenient staging valves integrated onto the Cleanfire HR<sub>x</sub> burner body. Pictured from left to right are the Cleanfire HR<sub>x</sub> burner in the Melt (under-staged), Split (dual over/under-staged) and Foam Control (over-staged) operating modes.

“With Air Products’ new Cleanfire HR<sub>x</sub> burner we have observed a significant reduction in crown temperature and fuel consumption, both as a result of the burner’s foam reduction capability. It has made a noticeable improvement in our operation.”

Young-Min Kim  
Technical Team General Manager  
of Techpack Solutions



## The Air Products advantage

Air Products is a global, leading industrial gas supplier. For more than 70 years, primary glass producers have turned to Air Products' continuously evolving portfolio of oxygen solutions to improve combustion and enable additional benefits, including increased glass production, reduced fuel consumption and emissions, and enhanced glass quality. Processed glass producers rely on us for safe and efficient supply and use of nitrogen, oxygen, hydrogen, helium, and argon for a number of applications involved in forming, assembly, and recycling of products.

Let us help optimize your production, as we have done for hundreds of furnaces all over the world.

## Proven benefits

- Reduction of secondary foam in the fining section of the glass melting tank has shown benefits of up to 40% reduction in glass defects, while reducing crown temperature by up to 50 deg C
- Reduction in NO<sub>x</sub> emissions of 40%, relative to previous generation of staged oxy-fuel burner
- Increase in fuel efficiency of up to 3% due to enhanced flame luminosity and reduced foam
- Wide range of independent control of flame length and momentum via staging has enabled operators to increase burner power by over 15%, without risk of damaging the furnace breast walls or crown

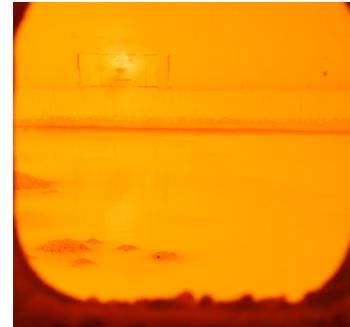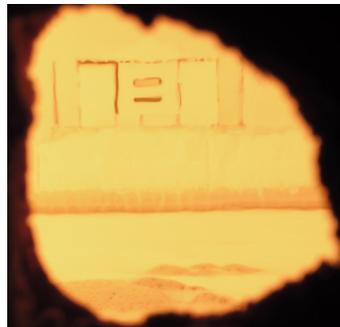

Operation of the Cleanfire HR<sub>x</sub> burner in the Foam Control mode (right) generates a reducing environment adjacent to the glass surface that destabilizes surface foam (left), yielding higher flame-to-glass heat transfer rates and improved glass refining.

### For more information:

#### Taiwan

5F, #21, Chung Shan North Road,  
Section 2  
Taipei 104, Taiwan  
Tel: +886 2 2521 4161  
Fax: +886 2 2581 8359  
Email: infotw@airproducts.com

#### China

Floor 2, Building #88  
Lane 887, Zu Chongzhi Road  
Zhangjiang Hi-tech Park  
Shanghai 201203, P.R.C.  
Tel: +86 21 3896 2000  
Fax: +86 21 5080 5585  
Sales hotline: 400 888 7662  
Email: infochn@airproducts.com

#### Korea

20F, The Pinnacle Gangnam  
343 Hakdong-ro, Gangnam-gu  
Seoul, 06060, Korea  
Tel: +82 2 2170 8000  
Fax: +82 2 733 0286  
Sales hotline: +82 1800 0832  
Email: apcskor@airproducts.com

#### Singapore

2 International Business Park  
#03-20 The Strategy  
Singapore 609930  
(General enquiries)  
Tel: +65 6494 2240  
(Sales enquiries)  
Tel: +65 6494 2173 / 6494 2296  
Fax: +65 6334 1005  
Email: mysgmkt@airproducts.com

#### Malaysia

Lot 54, Jalan Sungai Besar 26/7  
Seksyen 26 (HICOM Sector B)  
40000 Shah Alam  
Selangor, Malaysia  
(General enquiries)  
Tel: +603 2742 8118  
Fax: +603 2241 2377  
(Sales enquiries)  
Tel: +603 5101 8785 / 5101 8624  
Email: mymktg@airproducts.com

#### Indonesia

Kawasan Industri Cikarang  
Blok F1-3  
Cikarang, Bekasi  
Jawa Barat 17530, Indonesia  
(General enquiries)  
Tel: +62 21 2863 8600  
(Sales enquiries)  
Tel: +62 21 2863 8638 /  
+62 21 2863 8631  
Email: idmktg@airproducts.com



tell me more  
airproducts.com/HRx